



2.6


HIGH SPEED LINE BRUSHES

HS High Speed Brushes Crimped

WIRE BRUSHES / HIGH SPEED LINE BRUSHES



| Model | Diameter (d) | Trim Length (s) | Arbor Hole (e) | Coated Steel .012" | High-Performance Cable Crimped 12 x .009" | Stainless Steel .012" | Brass .012" | R.P.M. Max. |
|-------|--------------|-----------------|---------------------|-----------------------|--|--------------------------|----------------|-------------|
| HSC | 3" | 7/8" | 5/8"-11 & M14x2.0 | 73000 | - | 73030 | 73090 | 13,000 |
| HSC | 3" | 7/8" | M10x1.25 & M10x1.50 | 73001 | - | - | - | 13,000 |
| HCA | 3" | 7/8" | 5/8"-11 & M14x2.0 | - | 73010 | - | - | 13,000 |
| HSD | 4" | 1" | 5/8"-11 & M14x2.0 | 74000 | - | 74030 | - | 13,000 |
| HSP | 4-1/2" | 1" | 5/8"-11 & M14x2.0 | 78000 | - | 78030 | - | 13,000 |

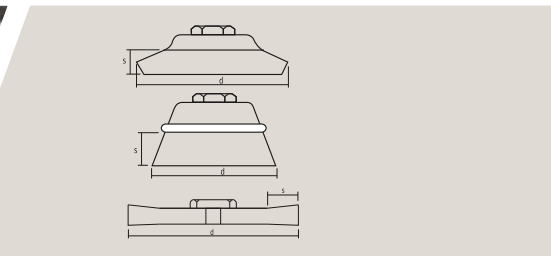




HS High Speed Brushes Knotted

WIRE BRUSHES / HIGH SPEED LINE BRUSHES



| Model | Diameter (d) | Trim Length (s) | Arbor Hole (e) | Tempered Steel | | Stainless Steel | | R.P.M. Max. |
|-------|--------------|-----------------|---------------------|----------------|---------|-----------------|---------|-------------|
| | | | | .015" | .020" | .015" | .020" | |
| HST | 2-3/4" | 3/4" | 5/8"-11 & M14x2.0 | 72060 | 72050 | 72090 | 72080 | 15,000 |
| HST | 2-3/4" | 3/4" | 5/8"-11 | 72062 | 72052 ● | - | 72082 ● | 15,000 |
| HST | 2-3/4" | 3/4" | M10x1.25 & M10x1.50 | 72061 ● | 72051 ● | - | 72081 ● | 15,000 |
| HST | 2-3/4" | 3/4" | 3/8"-24 | 72069 | 72059 ● | - | 72089 | 15,000 |
| TT | 3-1/2" | 7/8" | 5/8"-11 | 53062 | 53052 ● | - | 53082 | 15,000 |
| HSK | 4" | 7/8" | 5/8"-11 | - | 74050 | - | 74080 | 15,000 |
| HSK | 4-1/2" | 1-1/8" | 5/8"-11 | - | 76052 | - | 74182 | 12,000 |
| HSR | 4-1/2" | 1" | 5/8"-11 | 78062 ● | 78052 ● | - | 78082 ● | 20,000 |
| HSR | 4-1/2" | 1" | 5/8"-11 & M14x2.0 | - | 78050 | - | 78080 | 20,000 |

● Available in Bulk Packaging. Add "B" to end of Part No. when placing order.



Technical Information HS

- JAZ High Speed Brushes have been specially designed for low weight and high speed mini-grinders (11,000 R.P.M.).
- High removal capacity and efficiency at high speed performance.
- Comfortable use and elimination of human fatigue.
- Special design allowing access to angles and flexible performance on any surface.

Applications

- For continuous and frequent brushing processes (ship building, metallic structures, welding, maintenance, etc.).
- Exclusive design and patented multifitting thread in two different versions; one is valid for M14 and 5/8- 11 attachments (Code R88); the other is valid for M10 x 1,5 and M10 x 1,25 systems (Code R77). The new design is also extended to single threads. It allows an easier attachment and increases resistance resulting in more safety for the user.

